




REBUILDING IN THE AFTERMATH OF AN EARTHQUAKE USING LOCAL SKILLS AND KNOWLEDGE

Introduction

Building technologies in development projects are often developed to be used on a small, local scale. Even when working on a huge project, Bashir Sakhawar was convinced of the need to take local construction practices, resources, skills, and needs into account, when creating new settlements that will be sustainable and safe. While it was imperative to respond to the needs of disaster victims as quickly and humanely as possible, beneficiaries' skills, knowledge of local construction practices, and resources had to be taken into account.

On 30 September 1993, an earthquake in the Marathwada region rocked large areas of Maharashtra and Karnataka, particularly the settlements located in Latur and Osmanabad districts of Maharashtra. Nearly 10 000 people were killed and as many were injured. Countless houses, buildings, and infrastructure works were seriously damaged - buildings were damaged extensively in 83 villages, of which 25 suffered near-total destruction.

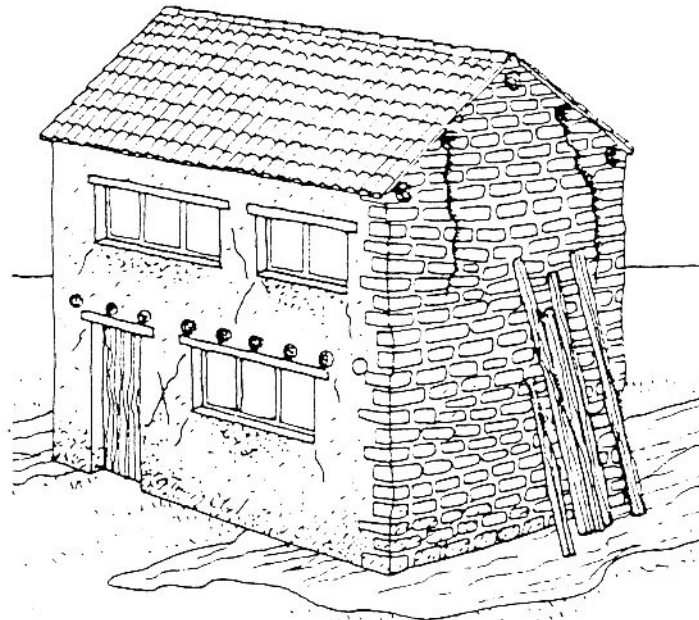

Many traditional stone and earth buildings are not built to withstand seismic activity, and are prone to crack and even collapse.

The devastation was so great that the Indian government asked for help from the international community to undertake a rehabilitation and reconstruction programme. The International Red Cross provided about £7 million -about 5 per cent of the overall costs -and the World Bank provided the remainder. The scale of the reconstruction needed meant that the whole project would be overseen by the government. The Building Material and Technology Promotion Council commissioned a team of professional, known as TARU -the Technology Section Research Unit for Development who undertook a rapid assessment of the damaged houses and buildings in the affected areas. Three teams of professionals made up of geologists, architects, civil engineers, sociologists, and management consultants visited the villages to study the cause and pattern of the damage, and to recommend cost-effective and appropriate technical strategies for house construction on new sites, and for the retrofitting and seismic strengthening of the various types of houses on the existing sites. The region may continue to be prone to earthquake tremors, so the technical options recommended conformed to standards for housing and buildings in Zone 4 of the earthquake zone map of the Bureau of Indian Standards. The villagers were not required to pay for any of the rebuilding.

Local decisions

Once the initial surveys had taken place, the team set out to design a process that would ensure that the communities were involved as much as possible in planning their new villages, and

houses. The scale of building required -about 80 villages for 200 000 people -meant that the villagers were going to have to work together with professional builders. In many villages every house had collapsed and rubble was strewn everywhere, and the need to provide shelter as soon as the communities felt able to make decisions about abandoning villages and relocating, or rebuilding on the site of such devastation and death meant that outside workers were going to be involved as well.

The government set up and managed a rehabilitation centre, to which each community was invited to send a representative. There the villagers discussed with the architects, planners, and builders the options for rebuilding. Many villages had to be relocated, so they talked about and decided where the new villages would be, how large they would be, and what type of school, community centre, and health centre they wanted. They planned the layout of the new (or rebuilt) villages, including infrastructure such as roads and water and electricity supply.

The most common failures in damaged buildings were the shattering and buckling of the outer face of stone masonry walls because of the lack of through stones, and corner failure in stone and brick masonry. Many walls had collapse, including load-bearing walls, and there were also many partial and total roof collapses. In RCC (reinforced cement concrete) structures the shear failure of brick masonry was apparent where there was a vertical opening between brick joints. Surprisingly, foundation settlement was uncommon in most of these houses.

A number of technical options for repairing non-engineered constructions and rebuilding were examined, including seismic-resistant building technologies that have been developed and promoted by various agencies. Traditional and improved traditional construction technologies were also evaluated. The criteria for evaluating the technologies included:

Structural safety Technologies must meet the all structural requirements for seismic zone 4 of the National Building Code.

Thermal comfort Houses must have adequate insulation and ventilation.

Maintainability Structures must be able to be maintained locally, and upgraded.

Cost effective The life cycle cost of the buildings should be as low as possible.

The cluster of technologies that emerged as the most appropriate for new construction in the region were:

Walling Graded stone/concrete blocks and concrete hollow blocks: and

Roofing Shabad stone (a local material) on steel grilling, pre-cast RCC planking on pre-cast joists, and RCC slabs cast in-situ.

Existing and traditional conditions

The affected area was connected by road to the Solapur-Hyderabad highway, which passes through Omerga town in the Osmanabad district. Omerga is 170km from Hyderabad. In this gently undulating hard rock terrain, with variable thicknesses of soil, the main feature that influences damage from earthquakes is the depth of the bedrock and the type of soil overlying it. Indirect factors like the presence of expansive clays and the possibility of liquefaction also need to be considered. In swelling soils, unless sufficient care is taken to avoid differential settlement, buildings are likely to develop cracks from the alternate wetting and drying of the soil during different seasons.

Damage was usually worse on sites with deep soils. In many villages situated on mounds over deep soils the earthquake-related damage was extensive.

The existing building and construction technologies depended on raw material availability and climate conditions. Stone, which was readily available, was the most common building material in the area. The soil, mainly black cotton, was not good enough for earth or brick construction, and hence local bricks were almost absent except for some bricks that were made from patches of red soil, and white soil that was used for the roof insulation layer in most buildings. Little timber was available anymore, but a considerable quantity of timber was already used in the houses and was recycled from generation to generation.


Earth and timber roofs on stone walls accounted for 80 per cent of houses. The layout of these houses varied, depending on family size, income, and status. The construction technology also varied with the age of the building and the community for which it was constructed. Thatched roofs on wattle and daub walls accounted for another 4 per cent of houses, most of which were occupied by the poorest scheduled caste households. These houses were usually only about

SOM2. Of the remaining houses, 2 per cent were thatched roofs on stone walls, and 1 per cent were earth and timber roofs on earth walls. These houses were usually occupied by relatively low-income households.

Traditional buildings and earthquake impact

The traditional buildings in this region were not built to resist seismic activity. In earthquake-prone regions like the Himalayas, vernacular buildings have evolved in response to the frequent occurrence of earthquakes, for instance by incorporating small openings, horizontal wooden bands at different levels of the buildings, and the use of long corner stones and through stones in random rubble masonry. The vernacular construction of the Marathwada region does not show any such features, indicating that either an earthquake has not happened for a long time; or so few people were affected during the last major earthquake that it did not cause any change in building patterns; or existing knowledge about earthquakes preparedness was lost when the communities were preoccupied with wars and mass migration during later periods.

A major earthquake had struck Latur in 1573. There is indirect evidence of the destruction of earlier settlements, such as the rubble-filled mounds in many villages, and reports of the discovery of artefacts like swords, vessels, and statues during digging for the foundations of new buildings and wells in the settlements. Archaeological excavation would be needed to prove conclusively past destruction by earthquakes.

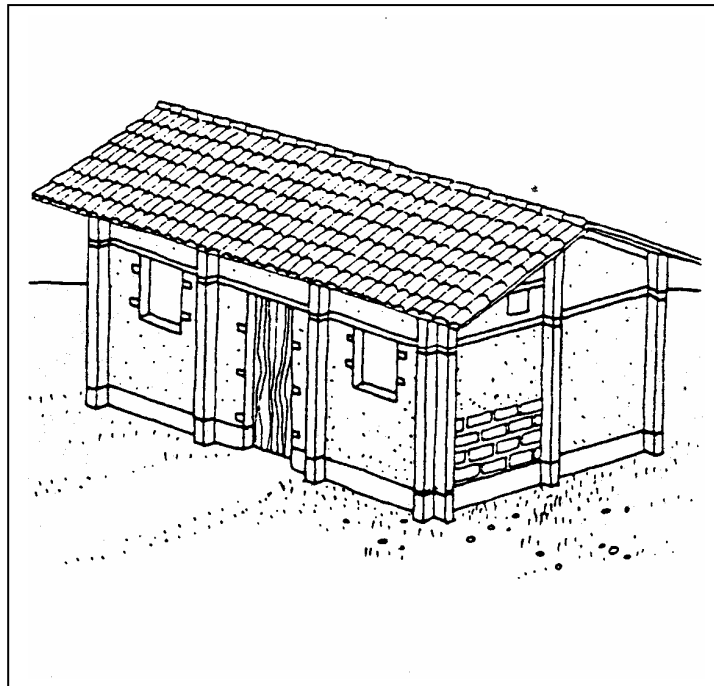

Conventional housing

In addition to the traditional buildings, there were also many newer, conventional houses. Of these, 5 per cent had galvanized corrugate iron (GCI) sheet roofs on stone walls. GCI sheets were used quite widely in the region, especially to cover semi-open spaces. Unlike RCC, CGI does not radiate heat at night, so quite a few houses had CGI verandas, even though the exclusive use of CGI sheet roofing does not provide the house with adequate thermal insulation. This is an important factor that had to be taken into account during the technology selection process.

RCC-roofed buildings constituted only 3 per cent of the total housing stock, divided equally between houses with earth, brick, and stone walls.

Even the earth-walled buildings were built with a fair amount of random stone rubble infill. Brick buildings were the most common addition to urban settlements, especially among the higher income households who were upgrading their homes.

Traditional construction practices were very strong in the Marathwada region, so a few basic principles had to be followed in the design of reconstructed houses, whether they were executed by private sector contractors, government departments, or local artisans.

The following design principles were applied to all categories of buildings. Local buildings and proposed designs that did not match these criteria were either modified or rejected in the public interest:

Structural safety Technologies should be earthquake-resistant within reason, that is meeting all the structural requirements of seismic zone 4 in the building standards.

Once an appropriate site is chosen, the house should be built using good quality materials. A low one-storey building in a square (with reinforced corners) or circular shape is best. (Illustrations from *Earth Construction: A comprehensive guide* by Hugo Houben and Hubert Guillaud. IT Publications, London, 1994.)


Thermal comfort Internal comfort had to be maintained, especially keeping the temperature fluctuation to a minimum during the summer months.

Functional efficiency Buildings should be able to accommodate all the essential functions of current houses, especially the storage of agricultural implements, a separate sleeping area, an independent cooking space, and shelter for animals. These needs determined a minimum area that the basic core unit would occupy. The provision of open, semi-open, and covered spaces should comply with existing practices, as should the layout and clustering of the buildings.

Cost effectiveness Given the above three factors, the most cost-effective technical option should be selected, taking into account the life-cycle cost of the buildings and its durability.

Use of local resources This is a subsidiary constraint which is currently being projected as the most important factor in technology choice. The bulk of international experience of reconstruction indicates that the average period of return to permanent dwellings across all documented national disasters is between one to three years. Hence, the choice of construction technology on the basis of speed of construction is not the most important factor. Many other constraints will delay construction, including the availability of land; sharing and demarcation the plots; infra-structure development; and the resumption of agricultural and other occupations. Speed of construction is probably not going to emerge as a critical constraint.

Community participation This is an absolutely necessary condition for the success of all relocation and reconstruction programmes, as has been demonstrated in both Indian and international experience. The participation of the local communities in the process of technology choice, decisions on methods of construction, building work, and supervision of works has proved not only to be successful in the long term, but also the most efficient economic option because of increased mobilization of community labour and resources.

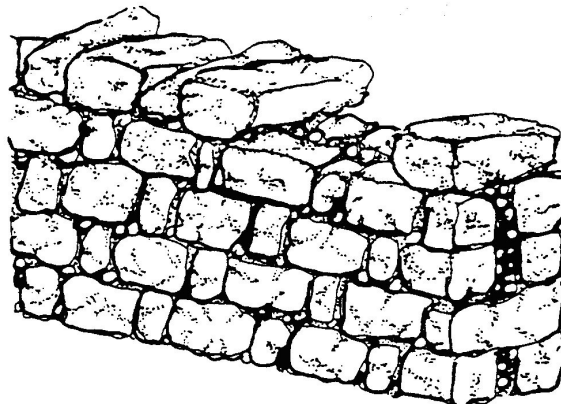

The use of long through-stones in a stone wall will make the wall more stable. (Illustration from *Technical Principles of Building for Safety* by Andrew Coburn, Richard Hughes, Robin Spence, and Antonis Pomonis. IT Publications, London, 1995.)

Relocation

People from affected villages wanted to relocate as they felt that their present villages were unsafe. In addition, as they had been forced to cremate or bury the bodies of the earthquake victims in the village itself, they did not want to build on the same site.

Purely in building terms, the relocation of the extensively damaged villages was desirable because:

- In settlements situated on mounds and deep soil areas, future earthquakes were likely to cause severe damage.
- The cost of removing tonnes of rubble could have been exorbitant, especially as any future buildings on these sites were likely to use thin stone walls. As most of the villages were surrounded by good agricultural land, the rubble would have had to have been dumped at a distance of more than 500m
- The cost of building on rocky or hard murrum would be much lower, as the foundations could be less than a metre deep
- Drainage systems would be cheaper and sanitation conditions would be much better on sloping shallow soil sites than on flatter land.

Technology interventions areas

There were four broad technology intervention areas in the affected districts:

- reconstruction of new buildings on new sites;

Rebuilding after an earthquake

Practical Action

- reconstruction of new buildings on old sites {including the recycling of the material};
- strengthening of lightly and moderately damaged buildings in intensity zones; and
- retrofitting of undamaged buildings in the region under risk. The main technology intervention in the reconstruction areas was the seismic strengthening of walls and the use of good-quality engineered and non-engineered masonry. The primary seismic strengthening options were:

- RCC tie beams at lintel and roof level;
- RCC nominal plinth tie beams. Since the new buildings were only single-storey structures that would be used for residential purposes, vertical reinforcements were provided in the comers of the buildings.

The major walling options that were considered were:

- improved coarse random rubble stone masonry in combination mortar (1:2:9) with 45cm wall thickness;
- graded stone concrete block masonry in combination mortar (1:2:9); and
- hollow concrete block masonry in cement mortar (1:6):

In addition the possibility of improving local stone masonry (with wall thickness of 35 to 45cm) by the use of mud mortar with suitable strengthening was investigated. The strengthening would be provided using lintel beams, RCC roofs, and RCC plinth beams.

The use of brick masonry was ruled out because of the totally inadequate quality of local bricks, which have a crushing strength that is below the accepted engineering standard of 35kg/cm².

Three foundations options were considered, including:

- strip footings for murram soil sites;
- strip footings for rocky sites; and
- under-reamed RCC piles with a plinth beam for black cotton soils.

Conclusion

The earthquake in Maharashtra not only had a disastrous effect on the lives of its victims, but was also a catalyst for change in the social fabric of the society. Relocation as part of resettlement (in some cases up to 10km away) distanced the displaced victims from their vital farming lands, and also led to other inevitable adjustments, such as the creation of a new cultural environment, and, in relation to construction, a shift from a rural to a more urban type of housing.

In the aftermath of an earthquake, providing housing is only one essential part of a disaster relief response. There are also issues of the mental and physical trauma of the victims to be addressed, rehabilitating the earthquake-affected communities not only materially but also socially and economically.

Civil engineers must join forces with other agents involved in disaster-relief response; consultants, social workers, governmental and non-governmental organizations, and community-based groups in order to ensure that a rehabilitation programme is appropriate and effective. An effective disaster-relief engineer will be only one part of a wide survey of a disaster situation, and must co-ordinate and communicate with all the agencies and individuals involved.

This Technical Brief was originally published in the *Appropriate Technology* journal Volume 15/Number 3 December 1988.

At the time of writing the author Bashir Sakharwaz was working with IT Transport.

IT Transport Ltd.
The Old Power Station
Ardington, Nr Wantage
Oxon
OX12 8QJ
United Kingdom
Tel: +44 1235 833753 /821366
Fax: +44 1235 833753/821366
E-mail: itt@ittransport.co.uk
Website: <http://www.ittransport.co.uk/>
Consultants in transport for rural development

For more information about *Appropriate Technology* journal contact:

Research Information Ltd.
222 Maylands Avenue
Hemel Hempstead, Herts.
HP2 7TD
United Kingdom
Tel: +44 (0)20 8328 2470
Fax: +44 (0)1442 259395
E-mail: info@researchinformation.co.uk
Website: <http://www.researchinformation.co.uk>
Website: <http://www.appropriatechnology.com>

Other Technical Briefs are available online from Practical Action

Practical Action
The Schumacher Centre for Technology and Development
Bourton Hall, Bourton-on-Dunsmore
Rugby, Warwickshire, CV23 9QZ
United Kingdom
Tel: +44 (0)1926 634400
Fax: +44 (0)1926 634401
E-mail: inforsev@practicalaction.org.uk
Website: <http://www.practicalaction.org/>

technical brief